



ČKD BLANSKO-OS

ALTA GROUP



PRODUKTKATALOG
PRODUCT CATALOGUE

VERTIKALE EINSTÄNDER – KARUSSELLDREHMASCHINE

SINGLE-COLUMN VERTICAL TURNING LATHE

Technische Daten / Technical data

		SKJ 32-63 D	SKJ 50-100 D	SKJ 63-100 D	SKJ 80-160 D
Durchmesser der Planscheibe Turning table diameter	mm	3 200	5 000	6 300	8 000
Max. Dmr. bis Mitte der Planscheibe Max. turning dia to the centre of table	mm	4 000	6 300	6 300	9 000
Max. Nenndrehdurchmesser Max. turning diameter	mm	6 300	10 000	10 000	16 000
Hub des Querbalkens Cross-rail stroke	mm	1 800	3 000	3 000	5 100
Verfahrweg des Ständers Column travel	mm	1 550	2 500	1 850	4 175
Max. Drehhöhe über Planscheibe Max. turning height	mm	2 500	4 000	4 000	6 500
Max. Belastung Max. work-piece weight	kg	50 000	100 000	100 000	320 000
Drehzahl der Planscheibe Turning table speed	rpm	0,87 – 25 3,5 – 100	0,5 – 12,5 2,0 – 50	0,5 – 12,5 2,0 – 50	0,25 – 6,2 1,0 – 25
Stößelquerschnitt Ram cross-section	mm	340 x 340	340 x 340	340 x 340	450 x 450
Vorschub des Stößels Ram stroke - vertical	mm	2 000	2 500	2 500	3 300



SKJ 63-100 D



SKJ 50-100 D



SKJ 63-114 D

VERTIKALE ZWEISTÄNDER – KARUSSELLEDREHMASCHINE

DOUBLE-COLUMN VERTICAL TURNING LATHE


Technische Daten / Technical data

		SKD 40/47 D	SKD 50/53 D	SKD 50/65 D	SKD 63/70 D	SKD 63/80 D	SKD 80/100 D
Durchmesser der Planscheibe Turning table diameter	mm	4 000	4 770	5 000	6 300	6 300	8 000
Max. Nenndrehdurchmesser Max. turning diameter	mm	4 700	5 300	6 500	7 000	8 000	10 000
Hub des Querbalkens Cross-rail stroke	mm	1 800	3 000	3 000	3 000	3 600	3 600
Max. Drehhöhe über Planscheibe Max. turning height	mm	2 500	4 000	4 000	4 000	5 000	5 000
Max. Belastung Max. work-piece weight	kg	60 000	100 000	100 000	150 000	150 000	320 000
Drehzahl der Planscheibe Turning table speed	rpm	0,7 – 20 2,8 – 80	0,5 – 12,5 2,0 – 50	0,5 – 12,5 2,0 – 50	0,5 – 10 2,0 – 40	0,5 – 8 2,0 – 40	0,25 – 6,2 1,0 – 25
Stößelquerschnitt Ram cross-section	mm	340 x 340	340 x 340	340 x 340	400 x 400	400 x 400	400 x 400
Vorschub des Stößels Ram stroke - vertical	mm	2 000	2 500	2 500	2 500	3 000	3 000

		SKDY 50/65 D	SKDY 50/80 D	SKDY 63/80 D	SKDY 80/100 D
Durchmesser der Planscheibe Turning table diameter	mm	5 000	5 000	6 300	8 000
Max. Nenndrehdurchmesser Max. turning diameter	mm	6 500	8 000	8 000	10 000
Hub des Querbalkens Cross-rail stroke	mm	3 200	3 200	3 200	4 800
Max. Drehhöhe über Planscheibe Max. turning height	mm	4 000	4 000	4 000	6 000
Max. Belastung Max. work-piece weight	kg	100 000	100 000	150 000	150 000
Drehzahl der Planscheibe Turning table speed	rpm	0,5 – 12,5 2,0 – 50	0,5 – 12,5 2,0 – 50	0,5 – 10 2,0 – 40	0,25 – 6,2 1,0 – 25
Stößelquerschnitt Ram cross-section	mm	340 x 340	340 x 340	400 x 400	400 x 400
Vorschub des Stößels Ram stroke - vertical	mm	2 500	2 500	2 500	3 200
Y Achse Y axis	mm	5 000	5 000	5 000	5 000



SKD 63/70 D

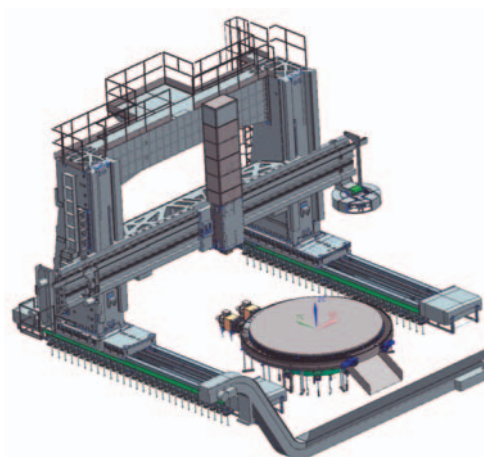

SKDY



ČKD BLANSKO-OS

ALTA GROUP

ČKD BLANSKO-OS, a.s.

Hauptsitz / Residence of company:

Štefánikova 41/110, 602 00 Brno, Czech Republic

Herstellwerk / Production plant:

Blanenská 257, 664 34 Kuřim, Czech Republic

Tel. / Phone: (+420) 541 101 111

Fax: (+420) 541 102 355

E-mail: machinetools@ckd-blansko.cz

www.ckd-blansko.cz